

Izdelek / Product: **JUBOLIN CLASSIC**



IZJAVA O LASTNOSTIH
DECLARATION OF PERFORMANCE
Št. / No. 001/20-JKT

1. **Enotna identifikacijska oznaka tipa proizvoda / Unique identification code of product**
02.01.01

2. **Predvidena uporaba / Intended use**

Tankoslojna izravnalna masa za fino glajenje notranjih zidnih in stropnih površin / Dispersion levelling compound for fine smoothing of interior walls and ceilings

3. **Proizvajalec / Manufacturer**

JUB d.o.o.
Dol pri Ljubljani 28
SI-1262 Dol pri Ljubljani
Slovenia
www.jub.eu

4. **Sistemi ocenjevanja in preverjanja nespremenljivosti lastnosti / System of AVCP**

Sistem 3 / System 3

5. **Tehnična specifikacija / Technical specification**

EN 15824:2017

Priglašeni organi / Notified Body:

ZAG 1404

6. **Navedene lastnosti / Declared performance**



Bistvene značilnosti / Characteristic	Lastnost / Declaration	Standard / Norm	Tehnična specifikacija / Technical specification
Odziv na ogenj / Reaction to fire	A2 s1 d0	EN 13501-1	EN 15824:2017
Sprijemna trdnost / Bond strength	> 0,45 MPa	EN 1542	EN 15824:2017
Toplotna prevodnost $\lambda_{10, \text{suh}}$ / Thermal conductivity $\lambda_{10, \text{dry}}$	0,67 W/mK, P=50%	EN 1745	EN 15824:2017
Paroprepusnost / Water vapour permeability	V1 (visoka) / V1 (High)	EN ISO 7783-2	EN 15824:2017


Lastnosti proizvoda, navedenega zgoraj, so v skladu z navedenimi lastnostmi. Za izdajo te izjave o lastnostih je v skladu z Uredbo (EU) št. 305/2011 odgovoren izključno proizvajalec, naveden zgoraj.

The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Podpisal za in v imenu proizvajalca / Signed for and on behalf of the manufacturer by:

Dol pri Ljubljani, 20.1.2020

Danijel Lisičić,
Vodja razvojnega področja

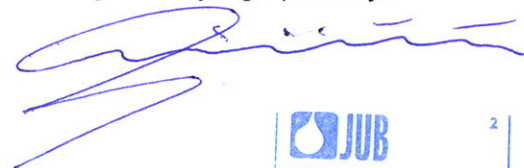


2





ZAG 1404

JUB d.o.o.
 Dol pri Ljubljani 28
 SI – 1262 Dol pri Ljubljani
 Slovenia
 11

Unique identification code of product: 02.01.01
 Declaration of performance No.: 001/20-JKT

EN 15824:2009

Internal plaster based on organic binder

Reaction to fire	A2 s1 d0
Bond strength	> 0,45 MPa
Thermal conductivity $\lambda_{10,dry}$	0,67 W/mK, P = 50% (value from EN 1745)
Water vapour permeability	V1

