

Proizvod / Product: TAKRIL CLASSIC

IZJAVA O USKLAĐENOSTI

DECLARATION OF CONFORMITY

Br. I No. 001/23-TKL

-
1. **Oznaka proizvoda** / Unique identification code of product

08.01.01

2. **Namjena proizvoda** / Intended use

Disperzijska boja za dekorativnu zaštitu betonskih površina i ostalih cementom vezanih podloga, prikladna za zaštitu od prodiranja tvari (Princip 1 prema EN 1504-9), za nadziranje vlage (Princip 2 prema EN 1504-9), i povećanje električnog otpora (Princip 8 prema EN 1504-9) / Dispersion paint made on the basis of polymeric binders for decorative protection of concrete surfaces and other surfaces bound by cement, suitable for protection against ingress (Principle 1, EN d504-9), for moisture control (Principle 2, EN 1504-9) and for increasing resistivity (Principle 8, EN 1504-9)

3. **Proizvodač** / Manufacturer

JUB d.o.o.
Dol pri Ljubljani 28
8-1262 Dol pri Ljubljani
www.jub.si

4. **Sistem ocjene usklađenosti** / System of AVCP

Sistem 4 / System 4

5. **Tehnička specifikacija** / Technical specification

EN 1504-2

BAS EN 1504-2: 2006



6. Deklarisana svojstva / Declared performance

Bitne karakteristike / Characteristic	Svojstva / Declaration	Standard / Norm	Tehnička specifikacija / Technical specification
C02 propusnost p (-) pri debljini 80 pm C02 permeability p (-) at thickness 80 m	152 x 10⁶	EN 1062-6	EN 1504-2:2004 BAS EN 1504-2:2006
Relativni otpor difuziji C02 Sd (m) / C02 diffusion-resistance value Sd m	116	EN 1062-6	
Propusnost vodene pare / Permeability for water vapour	Razred 2 (srednja) / Class 2 Medium	EN ISO 7783-2: 1999	
Relativni otpor difuziji vodene pare Sd (m) pri debljini premaza 95 pm / Water vapour diffusion resistance value Sd (m) at 95 m	0,24	EN ISO 7783-2:1999	
Kapilarna vodoupojnost / Capillary water absorption	Razred 3 (niska) / Class 3 low	EN ISO 10623:1999	
Kapilarna vodoupojnost W (kg/m²h^{0,5}) / Capillary water absorption W k /m ² h ^{0,5}	0,022	EN ISO 1062-3: 1999	
Određivanje toplotne kompatibilnosti za vanjsku upotrebu bez upotrebe soli Vizuelna ocjena / Thermal compatibility for external use (without salt immersion) Visual assessment	Odgovara / comply	EN 1542:2000 EN 13687-3:2002	
Određivanje toplotne kompatibilnosti za vanjsku upotrebu bez upotrebe soli — Prijanjanje prije starenja MPa / Thermal compatibility for external use (without salt immersion) Adhesion before a in MPa	≥1,0	EN 1542:2000 EN 13687-3:2002	



Odredivanje toplotne kompatibilnosti za vanjsku upotrebu bez upotrebe soli — Prijanjanje nakon starenja MPa / Thermal compatibility for external use (without salt immersion) Adhesion after a in MPa	≥1,0	EN 1542:2000 EN 13687-3:9002	
Odredivanje toplotne kompatibilnosti za vanjsku upotrebu sa uticajem soli Vizuelna ocjena I Thermal compatibility for external use (with salt immersion) - Visual assessment	Odgovara / comply	EN 1542:2000 EN 13687-1:2002 EN 13687-2:2002	
Odredivanje toplotne kompatibilnosti za vanjsku upotrebu sa uticajem soli — Prijanjanje prije starenja MPa I Thermal compatibility for external use (with salt immersion) Adhesion before a in MPa	21,0	EN 1542:2000 EN 13687-19002 EN 13687-22002	
Odredivanje toplotne kompatibilnosti za vanjsku upotrebu sa uticajem soli — Prijanjanje nakon starenja MPa I Thermal compatibility for external use (with salt immersion) Adhesion after a in MPa	21,0	EN 1542:2000 EN 13687-1 2002 EN 13687-22002	BAS EN 1504-2:2006
Odredivanje toplotne kompatibilnosti za vanjsku upotrebu sa uticajem soli sa masom za izravnavanje JUBOLIN F Vizuelna ocjena I Thermal compatibility for external use (with salt Immersion) - Visual assessment	odgovara	EN 1542:2000 EN 13687-1:2002 EN 13687-2:2002	



Odredivanje toplotne kompatibilnosti za vanjsku upotrebu sa uticajem soli sa masom za izravnavanje JUBOLIN F - Prijanjanje prije starenja MPa / Thermal compatibility for external use (with salt immersion) Adhesion before a in MPa	$\geq 1,0$	EN 1542:2000 EN 13687-1:2002 EN 13687-2:2002	
Odredivanje toplotne kompatibilnosti za vanjsku upotrebu sa uticajem soli sa masom za izravnavanje JUBOLIN F - Prijanjanje nakon starenja MPa / Thermal compatibility for external use (with salt immersion) Adhesion after a in MPa	$\geq 1,0$	EN 1542:2000 EN 13687-1:2002 EN 13687-2:2002	


Svojstva proizvoda navedena gore su u skladu sa deklariranim svojstvima. Za izdavanje izjave o uskladenosti je odgovoran isključivo gore navedeni proizvođač.

The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Potpisao za i u ime proizvođača / Signed for and on behalf of the manufacturer by:

Dol pri Ljubljani, 17.08.2023

Danijel Lisičić,
Vođa razvojnog područja

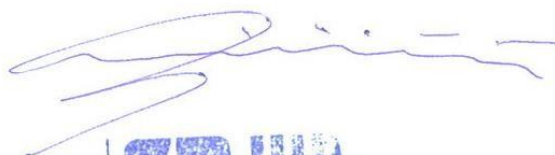



 JUB d.o.o.
 Dol pri Ljubljani 28
 SI-1262 Dol pri Ljubljani
 Slovenija
