


## TECHNICAL SHEET 05.06.19-EN

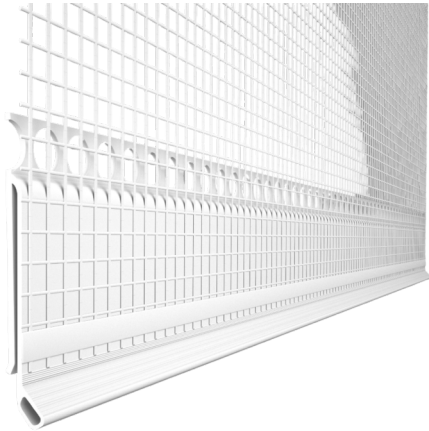

# JUBIZOL End profile for sheeting

**For joints of facade and sheeting.**

### 1. Description, usability

JUBIZOL METAL ROOF-EDGE JOINT is used to establish a flexible connection with ETICS and sheet metal. It is suitable for creating flexible connections between roof edges and the facade system. These contacts are also resistant to rainwater, so additional sealing of the contact with sealant is not necessary.

Features:

- Directed rainwater drainage
- Precise shaping of the edge
- Clean finish
- No cracks due to deviation from the metal sheet
- Flexible connection with the metal sheet, resistant to rainwater

### 2. Packaging

25 pieces / box  
62.5 m / box  
40 boxes / pallet  
2500 m / pallet

### 3. Technical data

Product name	JUBIZOL METAL ROOF-EDGE JOINT
Material	Polyvinyl chloride (PVC)
Batten length	2500 mm
Mesh attachment method	Welding

### 4. Installation

JUBIZOL METAL ROOF-EDGE JOINT is fitted onto the metal (e.g., roof edge) and adjusted according to the

length of the metal. Push the profile until it stops, and then lift it by 10 mm to allow for future movement absorption between the metal and the facade system. After installation, temporarily secure the profile in place with mounting screws into the insulation layer to maintain its position during the application of the adhesive mortar. Before applying the adhesive mortar, use a painter's trowel to move the reinforcing mesh away from the insulation lining, and then use a notched steel trowel to apply the first layer of base coat mortar. The mesh attached to the profile must overlap with the rest of the mesh embedded in the base coat mortar by at least 10 cm. Immediately after embedding the mesh, double-check the profile's position and adjust if necessary using a water scale. The reinforcing mesh, base coat mortar, and finishing layer must reach the drip edge of the profile.

For the display of the profile, see picture 001 in the appendix.

## 5. Instructions for safe use of the product

Safety handling instructions, first aid measures, fire protection measures, measures in case of accidental releases, special storage instructions, required personal protective equipment, waste handling instructions, special transport requirements, and other legally prescribed information are provided in the product's safety data sheet. In addition to these instructions, it is necessary to follow the guidelines and regulations for safety in construction, facade work, and painting when installing the product.

## 6. Storage. transportation conditions and durability

Packed in cardboard boxes. Store in a dry and covered area at a temperature of +5°C to +40°C. Transport in a horizontal position. Shelf life when stored in the original sealed and undamaged packaging: at least mesecev.


## 7. Other information

The technical instructions in this brochure are provided on the basis of JUB's experience and are given as a guideline for achieving the optimum results. JUB cannot accept any responsibility for the damage caused by incorrect selection of a product, incorrect use or unprofessional work.

Safety measures: Follow the instructions on the safety data sheet of the product.

This technical sheet supplements and replaces all preceding editions. JUB reserves the right to change and supplement data in the future.

Designation and date of issue: TDS 134/25-pek, 15.12.2025

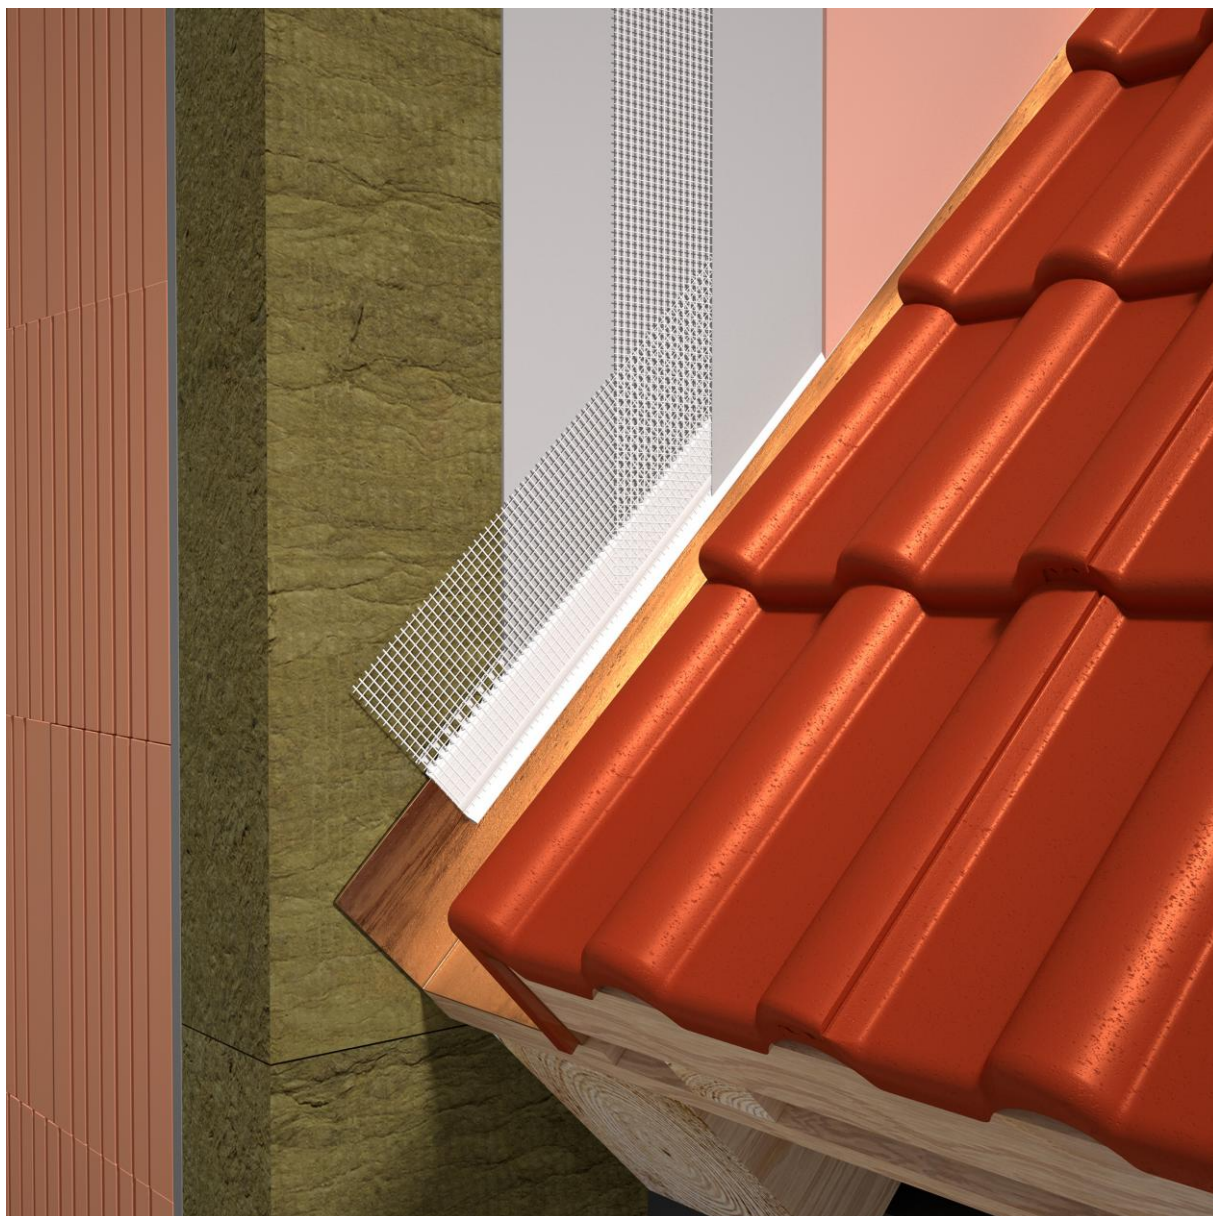

001