


TECHNICAL SHEET 05.06.11-EN

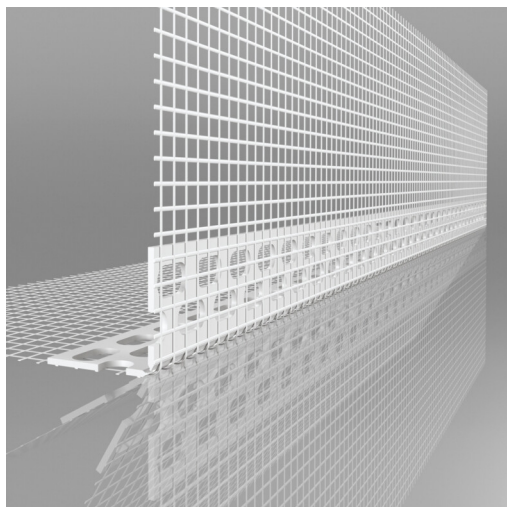

JUBIZOL Flexible corner bead

Flexible corner bead

1. Description, usability

JUBIZOL FLEX CORNER PROFILE with adjustable angle for reinforcing and protecting corners, edges, and outer edges of windows and doors in thermal insulation system - ETICS.

Features:

- Reinforcement of corners, edges, and window and door reveals
- Protection of corners against mechanical damage
- Prevents hairline cracks
- Achieving perfectly straight corners
- Due to the long thread on the coil, the risk of cracks formation is reduced (fewer overlapping sections)
- Flexible - can be used to protect corners with various slopes

2. Packaging

- JUBIZOL FLEX CORNER PROFILE (coil in cardboard - 25 m)

3. Technical data

Product name	JUBIZOL FLEX CORNER PROFILE
Material	PVC, resistance to alkaline fields Glass fiber mesh in accordance with ETAG 004
Batten dimensions (length x width)	(25 x 50) mm
Mesh width	200 mm
Mesh attachment method	Adhesive bonding (continuous mesh around plastic profile)

4. Installation

We cut the flexible corner bead to the desired length and bend it to the desired angle before installation (this

prevents the shape memory from pushing it out of the applied base coat). JUBIZOL FLEX CORNER PROFILE is installed by pressing the arms of the profile into a thin layer of adhesive mortar, which is applied in appropriately wide strips to the thermal insulation layer on both sides of the profile using a notched steel trowel. We align it using a water scale. The adhesive mortar squeezed through the reinforcement mesh of the flexible corner bead on the surfaces of the thermal insulation layer should be »stretched« out as much as possible, and any excess mortar should be removed.

For the display the profile, see picture 001 in the appendix.

5. Instructions for safe use of the product

Safety handling instructions, first aid measures, fire protection measures, measures in case of accidental releases, special storage instructions, required personal protective equipment, waste handling instructions, special transport requirements, and other legally prescribed information are provided in the product's safety data sheet. In addition to these instructions, it is necessary to follow the guidelines and regulations for safety in construction, facade work, and painting when installing the product.

6. Storage, transportation conditions, and durability

Packed in cardboard boxes. Store in a dry and covered area at a temperature of +5°C to +40°C. Transport in a horizontal position. Shelf life when stored in the original sealed and undamaged packaging: at least months.


7. Other information

The technical instructions in this brochure are provided on the basis of JUB's experience and are given as a guideline for achieving the optimum results. JUB cannot accept any responsibility for the damage caused by incorrect selection of a product, incorrect use or unprofessional work.

Safety measures: Follow the instructions on the safety data sheet of the product.

This technical sheet supplements and replaces all preceding editions. JUB reserves the right to change and supplement data in the future.

Designation and date of issue: TDS 126/25-pek, 15.12.2025

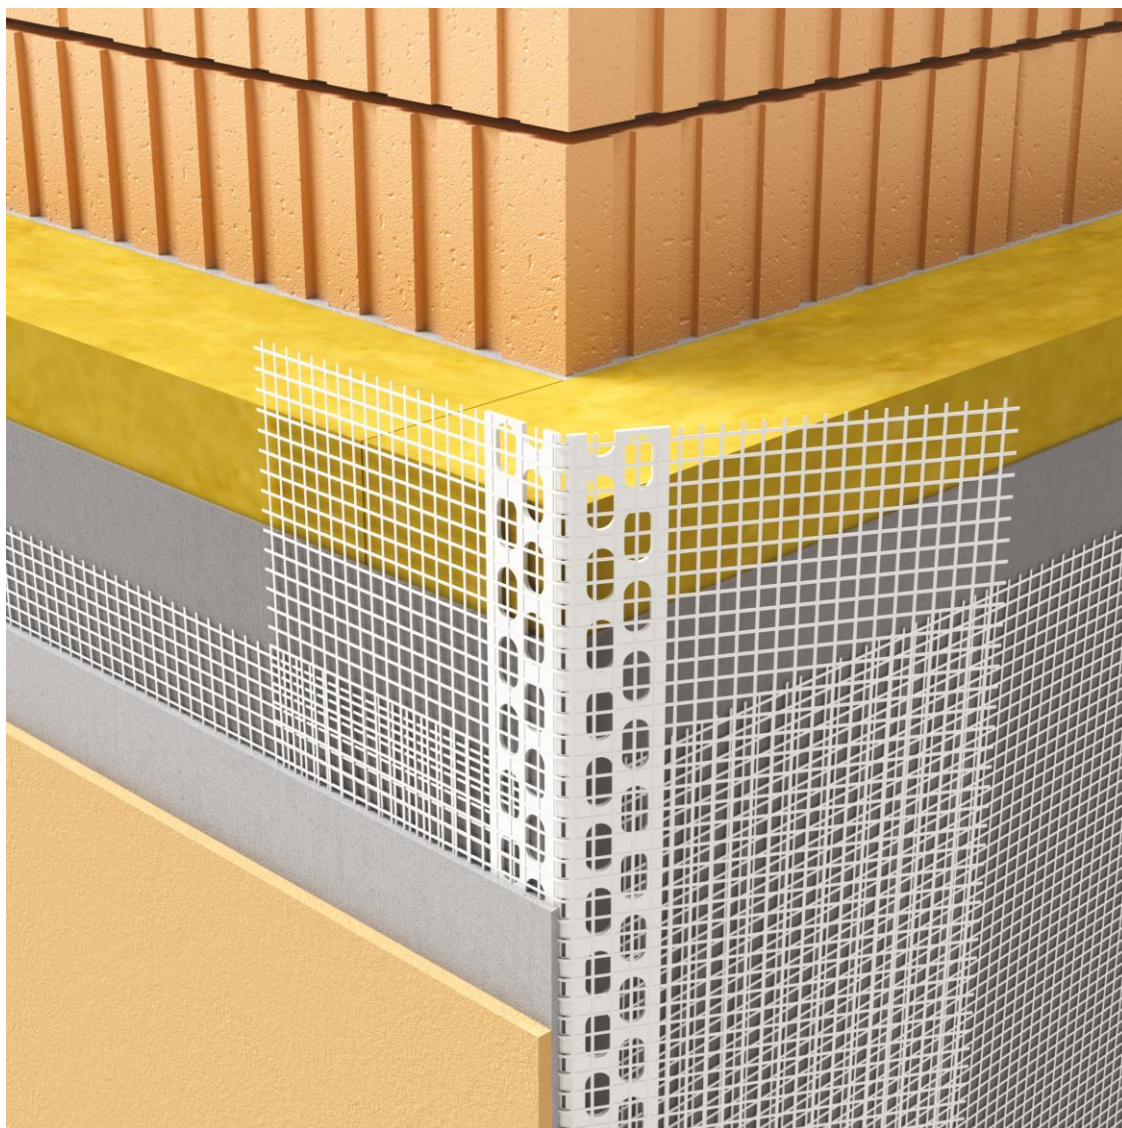

001