


TECHNICAL SHEET 05.06.17-EN

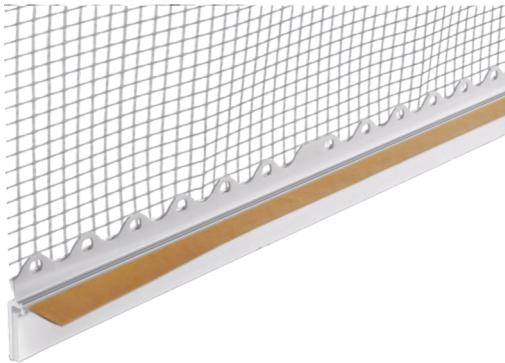

JUBIZOL Shutter profile

Along shutter guideways

1. Description, usability

JUBIZOL SHUTTER PROFILE is a reinforced profile made of rigid plastic that bridges the connections between the thermal insulation system and front-mounted roller shutter guides. The profile is equipped with a self-adhesive polyethylene sealing tape, resistant to rainwater. Perpendicular to the mesh, it is equipped with a self-adhesive tape for attaching a protective film, which protects windows and doors from splashing. The profile is a standard corner profile and cannot absorb movement (according to the manufacturer: up to 10% of the thickness of the sealing tape).

Features:

- No need for subsequent cleaning
- Clean finish
- Reduced noise transmission
- Maintenance-free joint
- No need for additional adhesive tape
- Joint resistant to rainwater spray
- Easy to use

2. Packaging

25 pieces / box
60 m / box
40 boxes / pallet
2400 m / pallet

3. Technical data

Product name	JUBIZOL SHUTTER PROFILE
Material	Polyvinyl chlorid (PVC)
Batten lenght	2400mm

Mesh attachment method

Welding

4. Installation

- All surfaces to which the profile is adhered must be flat, dry, and clean, free from dust, grease, or residues that could hinder adhesion.
- Trial adhesion is mandatory.
- Special surfaces (painted or dusted) require pre-treatment before installing the profiles. In this case, contact the shutter supplier.
- Processing temperature: +5 to +40 °C.
- The surface reinforcement mesh must overlap with the other mesh on the reveal surfaces by at least 10 cm.
- The reinforcement or final layer must not cover the break-off edge intended for the protective PVC foil. Otherwise, the break-off part of the profile cannot be fully removed.

5. Instructions for safe use of the product

Safety handling instructions, first aid measures, fire protection measures, measures in case of accidental releases, special storage instructions, required personal protective equipment, waste handling instructions, special transport requirements, and other legally prescribed information are provided in the product's safety data sheet. In addition to these instructions, it is necessary to follow the guidelines and regulations for safety in construction, facade work, and painting when installing the product.

6. Storage, transportation conditions and durability

Packed in cardboard boxes. Store in a dry and covered area at a temperature of +5°C to +40°C. Transport in a horizontal position. Shelf life when stored in the original sealed and undamaged packaging: at least months.

7. Other information

The technical instructions in this brochure are provided on the basis of JUB's experience and are given as a guideline for achieving the optimum results. JUB cannot accept any responsibility for the damage caused by incorrect selection of a product, incorrect use or unprofessional work.

Safety measures: Follow the instructions on the safety data sheet of the product.

This technical sheet supplements and replaces all preceding editions. JUB reserves the right to change and supplement data in the future.

Designation and date of issue: TDS 132/25-pek, 15.12.2025