


TECHNICAL SHEET 05.06.21-EN

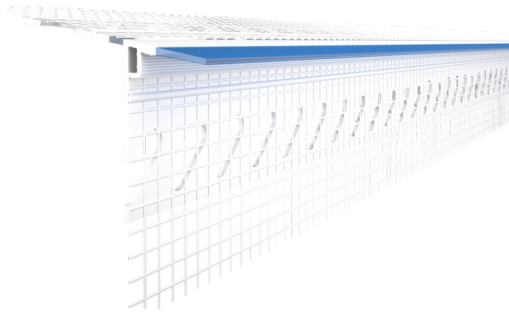

JUBIZOL Window sill bead

Under-shelf profile

1. Description, usability

JUBIZOL WINDOW SILL BEAD 2 M with double-sided fiberglass mesh and a transparent flexible drip edge for connecting the window frame profile and the ETICS thermal insulation system ensures a durable joint between the window sill and the insulation board. The transparent drip edge prevents the adhesive mortar and the finishing layer from adhering to the underside of the window sill or the finishing sheet on the parapet, thereby preventing the formation of uncontrolled hairline cracks.

Features:

- Assures indivisible joint between the sill and the insulation board
- Softened part to accommodate to the sill inclination angle
- Prevents cold penetration
- Protects the system against weather effects
- Prevents hair cracks in the connection point
- Eliminates the need for additional joint filling
- Pegs for secure connection of individual beads
- Transparent drip edge ensures protection against capillarity whilst provide high level of aesthetic finish
- Aesthetically refined detail

2. Packaging

- JUBIZOL WINDOW SILL BEAD 2 M (piece 2.0 m, carton 30 m)

3. Technical data

Product name	JUBIZOL WINDOW SILL BEAD 2 M
Material	PVC - UV stable, resistant to alkalis Glass fiber mesh in accordance with ETAG 004
Batten lenght	2000 mm

Mesh width	125 mm
Mesh attachment method	Welding with a plastic stick (resistance to alkalis and temperature changes)

4. Installation

Place the JUBIZOL WINDOW SILL BEAD 2 M on the bottom edge of the window or door opening and shorten it to the desired length. Apply adhesive mortar or waterproofing compound to the horizontal surface of the edge of the window or door wall and to the place where you want to install the profile mesh. Press the profile onto the mass and level it with a water scale. Then press the mesh onto the mass or mortar. Remove and level excess mass or mortar with a trowel. It is recommended to reinforce the inner corners of the window opening with additional strips of JUBIZOL Reinforcing mesh. After the plaster hardens, apply window sill adhesive to the surface where the window sill will be installed later. After applying the finishing layers of plaster, remove the protective tape from the transparent drip edge.

5. Instructions for safe use of the product

Safety handling instructions, first aid measures, fire protection measures, measures in case of accidental releases, special storage instructions, required personal protective equipment, waste handling instructions, special transport requirements, and other legally prescribed information are provided in the product's safety data sheet. In addition to these instructions, it is necessary to follow the guidelines and regulations for safety in construction, facade work, and painting when installing the product.

6. Storage, transportation conditions and durability

Packed in cardboard boxes. Store in a dry and covered area at a temperature of +5°C to +40°C. Transport in a horizontal position. Shelf life when stored in the original sealed and undamaged packaging: at least months.

7. Other information

The technical instructions in this brochure are provided on the basis of JUB's experience and are given as a guideline for achieving the optimum results. JUB cannot accept any responsibility for the damage caused by incorrect selection of a product, incorrect use or unprofessional work.

Safety measures: Follow the instructions on the safety data sheet of the product.

This technical sheet supplements and replaces all preceding editions. JUB reserves the right to change and supplement data in the future.

Designation and date of issue: TDS 137/25-pek, 15.12.2025