


## TECHNICAL SHEET 05.06.22-EN

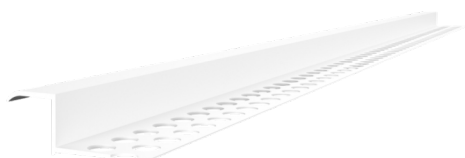

# PVC bead for shadow joint

## Profile for shadow line

### 1. Description, usability

PVC PROFIL ZA SENČNO REGO 2,5 M is designed for creating shadow joints in drywall constructions. It ensures a crack-free joint between gypsum boards and walls.

Features:

- Aesthetic refinement of details
- Joint between gypsum boards and walls without cracks
- Simple and fast installation
- Soft edge for installation on any wall surface
- For gypsum boards with a thickness of 12.5 mm

### 2. Packaging

- PVC PROFIL ZA SENČNO REGO 2,5 M (piece 2.5 m, cardboard 125 m)

### 3. Technical data

Product name	PVC PROFIL ZA SENČNO REGO 2,5 M
Material	Hard PVC and soft PVC - resistance to alkalis and UV light
Batten length	2500 mm
Plasterboard thickness	12.5 mm
Joint width	10 mm - 12 mm

### 4. Installation

Attach PVC PROFIL ZA SENČNO REGO 2,5 M to the drywall using staples or glue. Apply the plaster and finish it on the visible edge of the profile. The recommended joint width is 10 - 12 mm.

For the display of the profile, see picture 001 in the appendix.

## 5. Instructions for safe use of the product

Safety handling instructions, first aid measures, fire protection measures, measures in case of accidental releases, special storage instructions, required personal protective equipment, waste handling instructions, special transport requirements, and other legally prescribed information are provided in the product's safety data sheet. In addition to these instructions, it is necessary to follow the guidelines and regulations for safety in construction, facade work, and painting when installing the product.

## 6. Storage, transportation conditions and durability

Packed in cardboard boxes. Store in a dry and covered area at a temperature of +5°C to +40°C. Transport in a horizontal position. Shelf life when stored in the original sealed and undamaged packaging: at least months.

## 7. Other information

The technical instructions in this brochure are provided on the basis of JUB's experience and are given as a guideline for achieving the optimum results. JUB cannot accept any responsibility for the damage caused by incorrect selection of a product, incorrect use or unprofessional work.

Safety measures: Follow the instructions on the safety data sheet of the product.

This technical sheet supplements and replaces all preceding editions. JUB reserves the right to change and supplement data in the future.

Designation and date of issue: TDS 138/25-pek, 15.12.2025



001